



Resin + Mineral fillers
+ Coating

5 YEARS
GUARANTEE

Coating with excellent
resistance to hydrolysis.

High coating
UV resistant.

SUPERIOR HARDNESS coating
(<0.01 mm according to UNE EN 14688; maximum allowed 0.1 mm).

Antibacterial treatment
R<2 ISO 22196.

Consult installation
manual.

Technical specifications are subject to change without notice. Dimensional tolerances +/-5mm.

PIZARRA | LISO | COCODRILO

A 350 | B 500-1300




COCODRILO

A 350 | B 500-950




(mm)	PIZARRA LISO	COCODRILO
A	350-1300	350-950
B	1000-1500	1000-1500
C	100-350	100-350
D (standard version)	330	330
D (Less-abled version)	400	400

TULIP

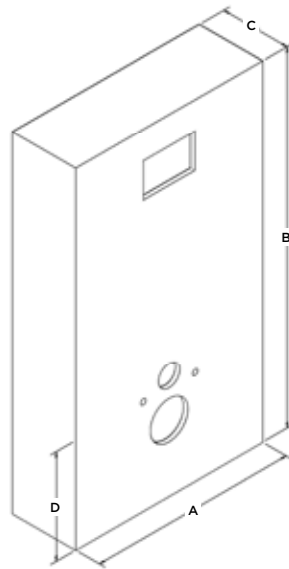

DAISY

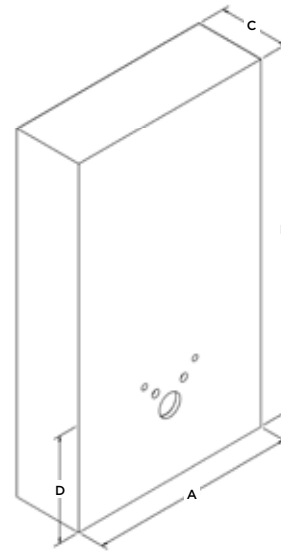

Available with or without side panels.

STANDARD COLOURS



SPECIAL COLOURS



RAL



NCS

