




LISO
ø400 h160



Resin + Mineral fillers
+ Coating



Coating with excellent
resistance to hydrolysis.



High coating
UV resistant.



SUPERIOR HARDNESS coating
(<0.01 mm according to UNE EN
14688; maximum allowed 0.1 mm).





Antibacterial treatment
R<2 ISO 22196.



Consult installation
manual.

Technical specifications are subject to change without notice. Dimensional tolerances +/-5mm.

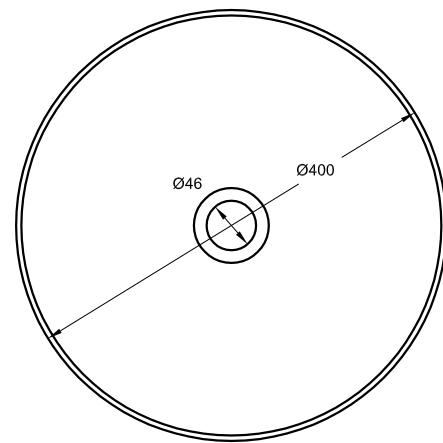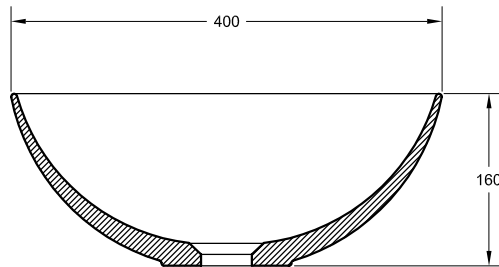

TEXTURE	Kg	mm
LISO	6	ø400 h160

STANDARD COLOURS



SPECIAL COLOURS



RAL



213 RAL

NCS




1950 NCS

ACCESSORIES

WASTES

CHROME PLATED
CLIC-CLAC / LOCK WASTE



With chrome plated grid
and overflow option

COLOURED
CLIC-CLAC / LOCK WASTE



With brass waste cover, in colour

CHROME-PLATED CLIC-CLAC / LOCK
WASTE INCLUDED

Siphons for countertop, washbasins and basins

CHROME-PLATED BRASS SIPHON

Length 300 mm
Height 5-120 mm



BLACK BRASS SIPHON

Length 300 mm
Height 5-120 mm

