


9 mm thick  
17 Kg/m<sup>2</sup>

<p><b>QUAREX</b> Resin + Mineral fillers + Coating</p>	<p><b>5 YEARS GUARANTEE</b></p>	<p>Coating with excellent resistance to hydrolysis.</p>	<p>High coating UV resistant.</p>
<p><b>SUPERIOR HARDNESS</b> coating (&lt;0.01 mm according to UNE EN 14688; maximum allowed 0.1 mm).</p>	<p>Antibacterial treatment R&lt;2 ISO 22196.</p>	<p>It can be cut on site by diamond saw</p>	<p>Recessed, raised or on Quare feet installation. Consult installation manual.</p>


Technical specifications are subject to change without notice. Dimensional tolerances +/-5mm.



**PIZARRA**  
L 400-1300 | H 700-2500



**LISO**  
L 400-1300 | H 700-2500

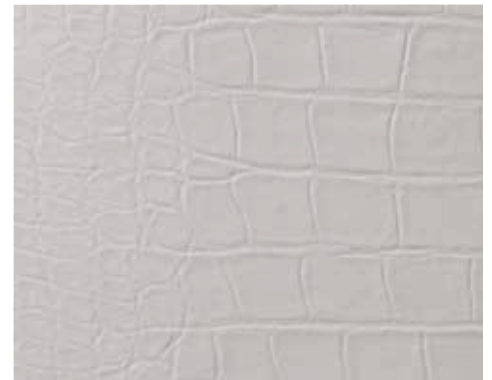

**COCODRILO**  
L 400-950 | H 700-2500



**MADERA**  
L 400-1000 | H 700-2500



**COMPOSITION**  
L 400-1000 | H 700-2500



**STREET**  
L 400-1000 | H 700-2500

STANDARD COLOURS

PURE WHITE	CREMA	GREY	GREGE	SILK GREY	FANGO
MACCHIATO	TERRA	GRAFITE	ANTRACITE	BLACK	NATURAL WHITE

Only available  
in Pizarra texture

PRINT

OXIDE	RUST	CITY	CARRARA	ONIX	IRIS

Only available in Pizarra and Liso textures

SPECIAL COLOURS

GOLD	FOSSIL	TERRACOTTA

RAL

213 RAL

NCS

1950 NCS